

SNCC.F.033



No. EXPEDIENTE  
EDENORTE-CAMARA

EDENORTE DOMINICANA  
OFERTA ECONOMICA

04/07/2022

NOMBRE DEL OFERENTE: COFAXCOMP, E.I.R.L.

RNC: 101882506

ÍTEM	CÓDIGO	DESCRIPCIÓN	UNIDAD	CANTIDAD	PRECIO UNITARIO (SIN ITBIS) RD\$	PRECIO UNITARIO (CON ITBIS) RD\$	MONTO TOTAL (CON ITBIS) RD\$
1	2016655	IP CAMARA TESTER	UN	1	54000	63720	63720
							<b>RD\$63,720.00</b>

OSCAR FERNANDEZ EN CALIDAD REPRESENTANTE LEGAL, DEBIDAMENTE AUTORIZADO  
PARA ACTUAR EN NOMBRE Y REPRESENTACION DE COFAXCOMP





# PLANILLA DE DATOS GARANTIZADOS



## IP Camara Tester

CÓDIGO 2016655  
 FECHA REVISIÓN 23/6/2022  
 ÁREA ESPECIALISTA:  
 Soporte Tecnico

DESCRIPCIÓN SAP: IP Camara Tester		DATOS	UNIDAD	PEDIDO	OFRECIDO	COMENTARIO
ITEM						
1	Empresa proveedora		...	(*)	COFAXCOMP	
2	Fabricante		...	(*)	Triplett Test Equipment and Tools	
3	Marca		...	(*)	TRIPLETT	
4	Modelo		...	(*)	IP Pro-D 8073	
5	País de origen		...	(*)	USA	
6	Norma de fabricación y ensayos		...	N/A	N/A	
7	Embalaje		...	CAJAS QUE NO EXCEDAN PESO DE 60 LIBRAS, PALETIZADO Y FLEJADO.	CUMPLE	
8	Garantía		año	1	1	
9	Comprobar camara IP		...	Si	Si	
10	Resistencia al agua y Polvo		...	Si	Si	
11	Prueba de control		...	RS485 PTZ	RS485 PTZ	
12	IP (ONVIF)		...	Si	Si	
13	Servidor DHCP		...	Si	Si	
14	Salida POE		Watts	15	15	
15	Conector RJ45 para PTZ		...	Si	Si	
16	Puerto RS485		...	Si	Si	
17	Teclado		...	QWERTY desplegable	QWERTY desplegable	
18	Resolucion de Pantalla		Px	800x400	800x400	
19	Tipo de panel		...	TFT Retro Iluminado	TFT Retro Iluminado	
20	Tamaño de pantalla		Pulg	4"	4"	
21	Colores		...	16,7 Millones de Colores	16,7 Millones de Colores	



	22 Incluye		<p><b>Acollador</b></p> <p>Batería recargable Bolsa de herramientas con correa para el hombro Inyector de potencia POE, cable de red Cable BNC Cable RS485 Cable de salida de alimentación de 12 V Cable de audio Cable USB 7.5 x 4.4 x 1.5"</p>	<p><b>Acollador</b></p> <p>Batería recargable Bolsa de herramientas con correa para el hombro Inyector de potencia POE, cable de red Cable BNC Cable RS485 Cable de salida de alimentación de 12 V 7.5 x 4.4 x 1.5"</p>
	23 Dimensiones	Pulg		3.5
	24 Peso	LB		3.5

(\*) A indicar por el oferente

(\*\*) Timbrado en el material en alto o bajo relieve



*Nelson Herrera*  
 Nelson Herrera  
 Coordinador Soporte Técnico

*4/7/2002*

Fecha de la oferta


Nombre y firma del oferente



## Security Camera Testers

### 807x Camview IP Pro Series

Designed to facilitate the installation and maintenance of surveillance video equipment

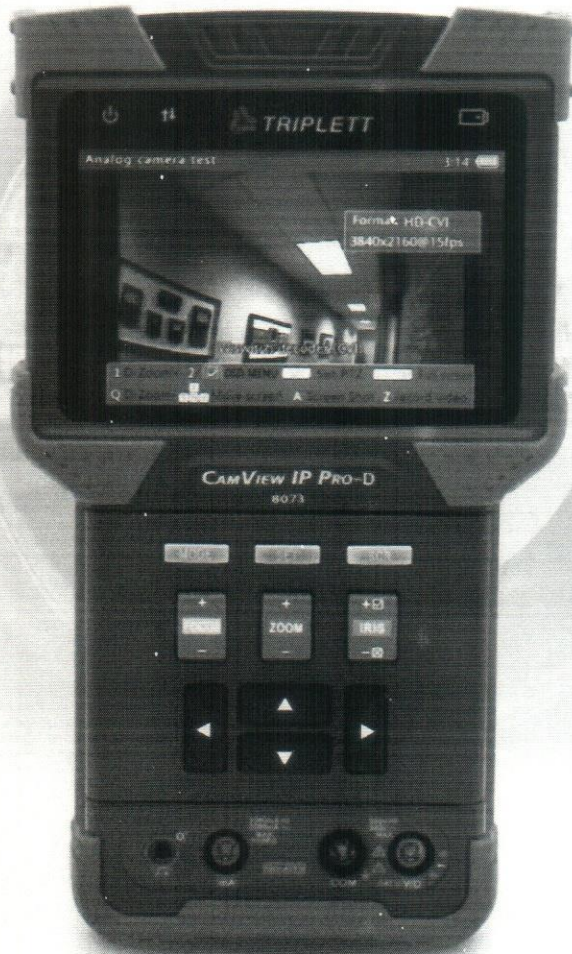

RoHS FC CE



Flip-Out QWERTY Keyboard for Quick Entry of Information

#### Features:

- 8070 IP Pro works with IP and NTSC/PAL cameras
- 8071 IP Pro+ supports H.264 IP cameras, as well as NTSC/PAL and AHD 1.0 and HD-TVI 2.0 analog video cameras up to 2MP
- 8073 IP Pro-D supports H.264 and H.265 IP cameras, as well as NTSC/PAL, AHD 2.0, CVI 3.0, and TVI 3.0 cameras up to 8MP and has a built-in True RMS multimeter
- 8071 and 8073 work with both SD and HD analog NTSC/PAL camera systems

#### All models:

- 4.3" LCD Display
- Work with or without a network
- Built-in DHCP server allows you to set & Assign IP addresses to cameras, auto-detect IP settings on networks and Ping, Sniff, List Subnet
- POE for IP cameras or 12VDC to analog cameras
- RS485 port for PTZ control of analog PTZ cameras
- PoE and external power for the camera (up to 12V,15W)
- Code Book so you can save usernames and passwords of the cameras you frequently access/maintain
- Ethernet and network tests; capture images, videos, and camera settings so you can create reports
- Check microphone/audio sources and even provide a bright flashlight function
- Both recorded images and video can be transferred to PCs or other devices via the USB port connection
- TDR cable testing and network testing



Complete with Lanyard, Rechargeable Battery, Tool Bag with Shoulder Strap, POE Power Injector, Network Cable, BNC Cable, RS485 Cable, 12V Power Output Cable, Audio Cable, USB Cable and Test Leads (8073 only)



**Specifications**

	8070	8071	8073
<b>ENCODING</b>			
SD Analog	X	X	X
AHD 2.0	X	X	X
AHD 3.0			X
HD-CVI 2.0			X
HD-CVI 3.0			X
HD-TVI 2.0		X	X
HD-TVI 3.0			X
IP (ONVIF only)	X	X	X
H.264	X	X	X
H.265			X
<b>FEATURES</b>			
DHCP Server	X	X	X
MJPEG	X	X	X
12VDC Output	X	X	X
POE Output	15W	15W	15W
TDR Testing	Ethernet only	Ethernet only	Ethernet only
Digital Multimeter			X
RS485 PTZ	X	X	X
Digital Zoom	X	X	X
Data Monitor	X	X	X
Analog Video Generator	X	X	X
HD Video Generator			up to 1080P 30fps
Record Snapshot	X	X	X
Record Video	X	X	X
Camera Report	IP only	IP only	IP only
File Export	X	X	X
Keyboard	Full QWERTY	Full QWERTY	Full QWERTY
Flashlight	X	X	X
<b>PHYSICAL FEATURES</b>			
Screen	Backlit 4" 16.7M color TFT	Backlit 4" 16.7M color TFT	Backlit 4" 16.7M color TFT
Resolution	800 x 480	800 x 480	800 x 480
<b>INPUTS</b>			
BNC & RJ45	X	X	X
<b>OUTPUTS</b>			
BNC & RJ45 & Mini USB	X	X	X
Dimensions	7.5 x 4.4 x 1.5" (190 x 113 x 37mm)	7.5 x 4.4 x 1.5" (190 x 113 x 37mm)	7.5 x 4.4 x 1.5" (190 x 113 x 37mm)
Weight	3.5lbs (1.6kg)	3.5lbs (1.6kg)	3.5lbs (1.6kg)

**Ordering Information:**

- 8070 Triplet CamView IP PRO
- 8071 Triplet CamView IP PRO+
- 8073 Triplet CamView IP PRO-D
- 37-71 Battery, LIPO, 3000MAH, 7.4V